

Take the Lead
Ice Cube Maker




The Story of Cold Ice - ICETRO



STAINLESS STEEL

Durable stainless steel exterior
Durable & Rustless case for long life.

ALL



AIR FILTER

Removable & cleanable air filter
to protect condenser from dust and grease.

SCI-035

SCI-050

SCI-090

SCI-120A

ICI-050V/H



ADJUSTABLE LEGS

Levelers standard 0 to 18mm (0' to 0.7')

SCI-035

Levelers standard 0 to 50mm (0' to 2')

SCI-050

SCI-090

SCI-120A

Levelers standard 0 to 115mm (0' to 4.5')

ICI-050V/H



AIR COOLED

No water usage for cooling the condenser
*Ambient temperature range 10°C~43°C

ALL

SELF-CONTAINED TYPE

STORAGE BIN

Each models have it's own storage bin for ice.

CRYSTAL ICE

The spray injection type makes individual cubes with unique bell shaped ice.

EASY INSTALLATION

Just connect electricity, water & drain hose then turn on the machine.



A25B15



SCI-035




SCI-050



SCI-090



SCI-120A



INSULATION

High density Polyurethane foam storage bin
keeps ice for long

ALL

VERTICAL & SELF-CONTAINED TYPE

STORAGE BIN

Dice ice with self-container

AIR VENTILATION

Front air IN & OUT



ICI-050V

ICI-050VH



Water Filter



Air Filter

VERTICAL & MODULAR TYPE

OPTIONAL STORAGE BIN


Up to 150Kg optional storage bin [SCI-235B]
for Modular series.

LARGE PRODUCTION

Modular type is suitable for large stores.

EASY OPERATION

Simple indicator & switch

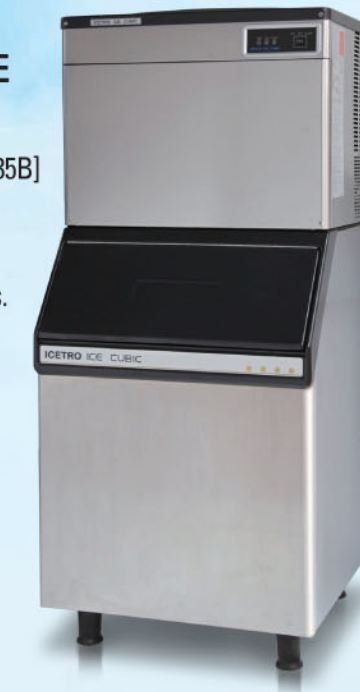

SCI-200A

SCI-200AH

SCI-300A

SCI-300AH



SCI-530A

SCI-530AH

SCI-235B
STORAGE BIN

SPRAY & SELF-CONTAINED TYPE

MODEL	A25B15	SCI-035	SCI-050	SCI-090	SCI-120A
Production	30Kg (66Lbs)	32Kg (71Lbs)	48kg (106Lbs)	89Kg (197Lbs)	125Kg (276Lbs)
Storage Capacity	12Kg (26Lbs)	10Kg (22Lbs)	13Kg (28.7Lbs)	45Kg (99.21Lbs)	45Kg (99.21Lbs)
Dimension [mm]	378 x 624 x 855	403 x 460 x 757	523 x 635 x 902	758 x 648 x 1,125	750 x 656 x 1,136
[inch]	14.9 x 24.6 x 33.7	15.9 x 18.2 x 29.8	20.6 x 25.0 x 35.6	29.9 x 25.6 x 44.3	29.6 x 25.9 x 44.8
Weight	50Kg (110Lbs)	50Kg (110Lbs)	58Kg (128Lbs)	90Kg (199Lbs)	102Kg (225Lbs)
Compressor	0.35HP/3,300BTU	0.37HP/3,500BTU	0.5HP/4,800BTU	0.75HP/8,200BTU	1.0HP/12,800BTU
Power consumption	500w	450w	800w	1,100w	1,400w
Refrigerant	R-134A	R-134A	R-404A	R-404A	R-404A
Ice cubes	24ea/cycle	24ea/cycle	36ea/cycle	60ea/cycle	60ea/cycle
Voltage option	115v/60hz/1PH				
	208~230V/60Hz/1PH				
	220~240V/50Hz/1PH				

VERTICAL TYPE

MODEL	ICI-050V, 050VH	SCI-200A, 200AH	SCI-300A / 300AH	SCI-530A / 530AH	SCI-235B(STORAGE BIN)
Production	43Kg (96Lbs)	210Kg (463Lbs)	310kg (684Lbs)	420Kg (926Lbs)	-
Storage Capacity	13Kg (28.7lbs)	-	-	-	150Kg (331Lbs)
Dimension [mm]	520 x 570 x 760	762 x 614 x 590	762 x 614 x 590	762 x 614 x 1,180	764 x 780 x 1,050
[inch]	20.5 x 22.5 x 29.9	30.0 x 24.1 x 23.3	30.0 x 24.1 x 23.3	30.0 x 24.1 x 35.5	30.1 x 30.7 x 41.4
Weight	50Kg (111Lbs)	75Kg (166Lbs)	80Kg (177Lbs)	150Kg (331Lbs)	70Kg (154Lbs)
Compressor	0.47HP/4,200BTU	1.0HP/12,800BTU	1.5HP/18,000BTU	2HP/25,600BTU	-
Power consumption	500w	1,250w	1,300w	2,500w	-
Refrigerant	R-134A	R-404A		-	-
Ice cubes [Full dice]	60ea/cycle	140ea/cycle		-	-
[Half dice]	120ea/cycle	360ea/cycle		-	-
Voltage option	115V/60Hz/1PH	-		-	-
	208~230V/60Hz/1PH		220~240V/50Hz/1PH		-
Remark	Self-Contained Type	-	-	Two units of SCI-200A combined	-

- Products` exterior and specification can be modified without prior notice.

- Operation Requirements

Ambient Temp Range : 10°C~43°C (50°F~110°F)

Water Temp Range : 10°C~32°C (50°F~90°F)

- All models certified by CE & ETL, ETL SANITATION
- The production capacity is based on 21°C air and 10°C water.



AUSTRALIAN SLUSH MACHINES

Web-site : www.australianslushmachines.com.au

Tel : 0418 344 048

email : australianslush@optusnet.com.au

Distributed by: